FIXALL®
SINCE 1883

F68498
FIXALL FEATHERWEIGHT SPACKLE® WITH COLOR CHANGING TECHNOLOGY

TECHNICAL DATA SHEET

DESCRIPTION:

FixALL Featherweight Spackle, formulated with Color Changing Technology, is a lightweight wall-repair spackle engineered for both interior and exterior applications. The advanced formulation resists shrinkage, cracking, sagging, and bowing, helping maintain long-term surface integrity. This spackle is designed for patching and filling cracks, nail holes, crevices, and other minor surface imperfections in drywall, plaster, or wood substrates. It is also recommended for smoothing wall surfaces before wallcovering and leveling wood before painting.

FEATURES AND BENEFITS:

- **Color Changing Technology –** Applies pink and dries white when ready to sand.
- **Lightweight Formula –** Applies smoothly, dries fast, and sands easily.
- **Non-Shrinking and Non-Cracking –** Maintains surface uniformity and finish integrity after curing.
- **Multi-Surface Use –** Suitable for interior and exterior surfaces including drywall, plaster, and wood.
- **Excellent Adhesion –** Bonds securely to a variety of substrates for durable, long-lasting repairs.
- **Paint and Wallcovering-Ready –** Ideal for surface preparation before painting or wallcovering installation.

TYPICAL USE

FixALL Spackle is intended for general-purpose surface repair and preparation. Typical applications include:

- Filling nail holes, cracks, and surface imperfections in drywall, plaster, or wood.
- Leveling irregularities prior to application of wall coverings or finish coatings.
- Repairing minor surface defects on interior and exterior substrates where a smooth, paintable finish is required.

TECHNICAL DATA:

Color (Wet/Dry)	Applies pink / Dries white
Base	Water-based acrylic compound
Consistency	Smooth, lightweight paste
Weight per Gallon	Approximately 4.0–4.5 lbs/ Gal (1.8–2 kg/L)
Weight Solids %	50% ±2
Drying Time	30 Minutes – 1 Hour depending on film thickness, temperature, and humidity
Ready to Paint/Sand/ Recoat	When fully dry (color change complete)
Application Temperature	Minimum 50°F (10°C)
Cleanup	Warm, soapy water
Shelf Life	12 months in unopened container when stored at room temperature

APPLICATION:

1. **Surface Preparation:** Ensure surfaces are clean, dry, and free of dust, grease, or loose material. Remove any deteriorated paint or debris before application.
2. **Application:** Using a clean putty knife or trowel, apply FixALL Spackle directly to the repair area. Press firmly to ensure full contact and adhesion and remove excess material.
3. **Drying Time:** Drying time varies depending on film thickness, temperature, and humidity. Product will indicate readiness for sanding and finishing through Color Changing Technology.
4. **One-Coat Repair:** This lightweight, low-shrink formula is designed to fill most common holes, cracks, and surface imperfections in a single application.
5. **Finishing:** Once dry, smooth and feather while wet to minimize or eliminate sanding. Large or unusually deep repairs may require additional material. Lightly sand as needed.
6. **Cleanup:** Clean tools immediately after use with warm, soapy water.

WARNING! If you scrape, sand or remove old paint, you may release lead dust. LEAD IS TOXIC. EXPOSURE TO LEAD DUST CAN CAUSE SERIOUS ILLNESS, SUCH AS BRAIN DAMAGE, ESPECIALLY IN CHILDREN. PREGNANT WOMEN SHOULD ALSO AVOID EXPOSURE. Wear a NIOSH-approved respirator to control lead exposure. Clean up carefully with a HEPA vacuum and a wet mop. Before you start, find out how to protect yourself and your family by contacting the National Lead Information Hotline at 1-800-424-LEAD or log on to www.epa.gov/lead.

STORAGE & HANDLING PRECAUTIONS:

Store in a tightly closed container at room temperature. Protect from freezing and excessive heat. Dispose of empty containers in accordance with local regulations.

ICP Construction, Inc.
150 Dascomb Rd., Andover, MA 01810
866.667.5119 | www.icpgroup.com | H26

FIXALL®
SINCE 1883

F68498
FIXALL FEATHERWEIGHT SPACKLE® WITH COLOR CHANGING TECHNOLOGY

TECHNICAL DATA SHEET

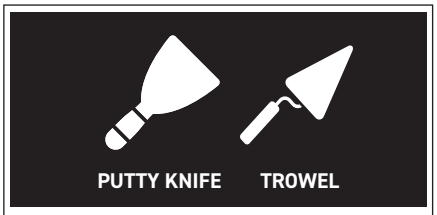

APPLICATION TOOLS

SAFETY INFORMATION:

Refer to the product's Safety Data Sheet (SDS) for detailed health and safety information. Use only with adequate ventilation. Avoid contact with eyes and prolonged skin exposure.

LIMITATIONS:

Not intended for large deep repairs. Do not apply when temperatures are below 50°F. Not recommended to be used with joint tapes/mesh or applied as a skim coat. If using on wood surfaces, apply a stain blocking primer prior to application.

EXTERIOR APPLICATION:

For best performance and long-term durability, exterior surfaces should be properly prepared and primed before applying Spackle. Once the Spackle has fully dried, apply a suitable exterior-grade topcoat as soon as practical to protect the repair from moisture and environmental exposure. Not intended for use to exterior horizontal surfaces.

Visit fixallpaint.com for additional products.

ICP Construction, Inc.
150 Dascomb Rd., Andover, MA 01810
866.667.5119 | www.icpgroup.com | H26